EIKI
A-Key to better communications.

LC-X1UA
POWERHOUSE ONE Plus
XGA/MAC19 Data/Video Projector

KEY FEATURES:

- Projects 1024 x 768 pixels, for real XGA/MAC19 resolution.
- 2100 ANSI Lumens at 85% uniformity with 300:1 contrast ratio.
- Projects images up to 40' wide (600" diagonal) over distances up to 117'.
- Displays higher resolutions up to 1280 x 1024 compressed or panned.
- 135 mHz dot clock for compatibility with most workstations.
- Input/Output modules permit VGA, 5BNC and 13W3 configuration.
- Power Lens Shift offsets the image in both directions (up & down) by up to half the image height: projector doesn't invert, or need-to.
- Optional Telephoto and Wideangle Lenses.
- 3 Year* Projector Warranty! 6 Month* Lamp Warranty!

Now 2100 Lumens!

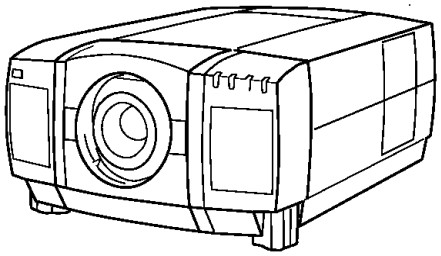

OTHER IMPORTANT FEATURES:

- Accepts Composite, Component, and S-Video Input. Displays 4:3 and 16:9.
- Multi-Format Video: NTSC / PAL / SECAM / NTSC 4.43 / PAL-M / PAL-N
- Included Accessories: Owner's Manual, AC Power Cord. Dust Cover. Lens Cap. VGACable. MAC Adaptor. Wireless Remote Control and AA batteries. Mouse cables for PS/2, Serial Port, ADB Port. Wired Remote & AA batteries & 5' (1.5m) cord.
- Optional Accessories; VGA, 5BNC, and 13W3 Input/Output Modules. Telephoto and Wideangle Lenses. Soft Carry Bag with wheels and telescoping handle. Hard Shipping Case. Ceiling Mount and Post & Plate. MAC Monitor Cable. Other/Additional Input Cables.

SPECIFICATIONS:

Screen Brightness	2100 ANSI Lumens
Illumination Uniformity	85%+
Size of Color Palette	16.7 Million
Contrast Ratio	300:1 (ANSI 100:1)
Horizontal Resolution	800 TV Lines
Projection Lamp	400 Watt Metal Halide
Estimated Lamp Life	2,000 Hours
Imaging System	1.8" PolySilicon active matrix TFT Panels x 3
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	2,359,296 ((1024 x 768) x 3)
LensType	1:1.6 ratio Power Zoom and Focus
Lens Speed and Focal Length	*f:* 2.6~3.5; 2.65~4.24 in (67.3~107.6mm)
Image Diagonal	30"~600"
Image Width	2'~40' (0.6m~12.2m
Throw Distance	3.6'~117' (1.1m~35.65m)
Width-to-Throw Factor	1.8~2.9
Front Elevation / Maximum Tilt	Up to 4º up/ 45º up or down
Anti Keystone	Power Lens Shift, Ratio (Top:Bottom) 10:0~0:10
Scanning Frequency	Automatic: H Sync. 15~80kHz; V Sync. 50~100Hz
Dot Clock	135 MHz
Image Orientation	Normal, Reversed, Inverted (projector does not invert)
Local Control	Full Function
Remote Projector & Mouse Control	HandHeld, Wireless (InfraRed x 1)
Projector-Mouse Control Ports	Two Sets: 12 Pin DIN x 1, USB port x 1
Remote Projector Control	HandHeld, Wireless (InfraRed) / Wired x 1
Projector Control Ports	MiniStereo x 1
RS-232 Control Port	(Serial Port type) Dsub9 x 1
Computer: Native Resolution	1024 x 768 (XGA/MAC 19)
Computer: Higher Resolutions	up to 1280x1024, compressed or panned
Computer: Lower Resolutions	down to 640x480, normal or expanded
Computer: Computer Channels	2
Computer: Input: Channel 1	5 BNC (R,G,B,H,V) x 1
Computer: Input: Channel 2	Supplied VGAcable/ MAC adapter to HDB 15
Computer: Monitor Out	HDB 15 x 1
Computer: Audio Input	Two Sets: RCAx 2 (Stereo)
Computer: Audio Monitor Out	RCA x 2
Video: Standards	NTSC/ PAL/ SECAM/ NTSC 4.43/ PAL-M/ PAL- N
Video: Formats	Normal (4:3); Wide (16:9)
Video: Imaging	Line Doubled and Expanded
Video: Channels	2
Video: Systems	Composite, Component, S-Video
Video: Input Connections	Two Sets: BNC x 3, S-Video x 1
Video: Audio Input	Two Sets: Stereo: RCAx 2
Video: Monitor Output Systems	Composite, Component, S-Video
Video: Monitor Output Connections	BNC x 3, S-Video x 1
Video: Audio Monitor Output	Stereo: RCAx 2
Audio Output: Amplifier	3 Watts RMS (each L&R) Stereo
Audio Output: Speakers	2 x 3.5 in. (5x9cm) x 2
Size (HxWxD)	9.2 x 15.4 x 22.9 in. (233.6 x 390 x 581.5 mm)
Weight	38.1 lbs. (17.3 kg)
Power Requirements	100~120V / 200~240V AC, 50/60Hz
Power Consumption	630Watts / 2,150 BTU'/hr.
Power Cord	10' (3M) Type 3, Detachable
Safety Compliance	ULListed
Warranty: Projector:	3 Years/6000 hrs. (Parts and Labor to Correct Defects)
Warranty: Lamp	6 Months/ 1000 hrs. (Replacement of Failed Lamp)

Specifications subject to change without notice.
©1998 EIKI International, Inc. Printed in the USA. 9/4/98

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com
EIKI CANADA, 17036 Highway 12, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com
Fax-on-Demand tollfree: 877-345-4329 (705-527-4438) World Wide Web site: http://www.eiki.com